
SHOWER CHANNEL FOR WALK-IN TILED SHOWERS WITH REVERSIBLE GRATING



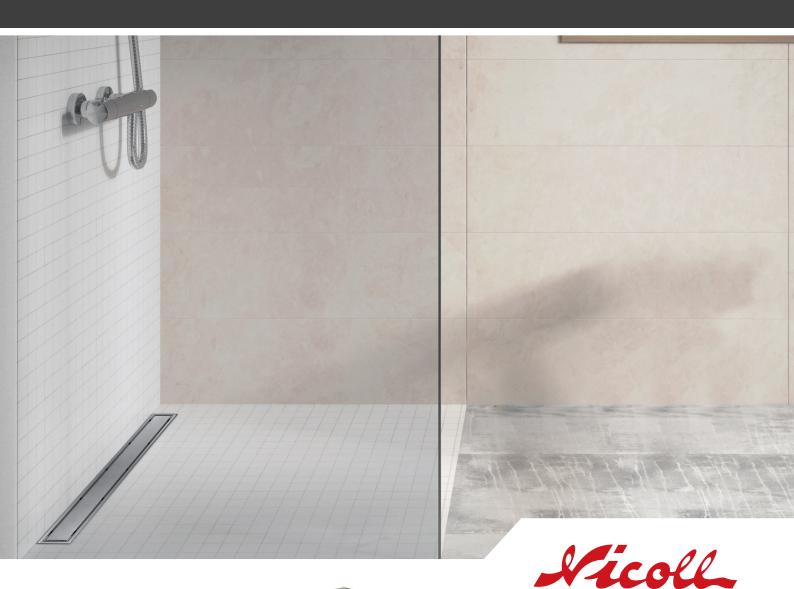

by **aliaxis**

THE IDEAL SHOWER CHANNEL FOR TILED SHOWERS.

- > A stainless-steel channel body and a stainless steel grating,
- > Two available lengths: 500 mm or 700 mm,
- > Reversible: to be tiled or stainless steel finish.
- > A performing drainage system: Nicoll Turboflow® waste.
- > Two included connectors: an elbow for bonding \emptyset 40/50 mm + an adapter \emptyset 40 x 50 mm


Ð

FUNCTION

• The shower channel is used to drain tiled showers.

DESCRIPTION

- The product consists of a stainless-steel channel body and a stainless steel grating, length 500 mm or 700 mm, reversible (to be tiled or stainless steel finish). The drainage is made through a Turboflow[®] waste.
- Two connectors supplied : a Ø 40/50 mm elbow & a short Ø 40x50 mm adapter.



TECHNICAL FEATURES

- Channel and grating made of stainless steel grade 304.
- Overall height (channel body and waste): 80 mm.
 Waste TurboFlow[®] in polypropylene -
- Flow rate: 0,65 l/s under 15 mm water load.
- Water seal: 50 mm height.
- ABS swivel horizontal outlet (to be glued or push fit).
- ABS short adapter for Ø50 mm horizontal outlet (to be glued or push fit).
- Ø40/50 mm ABS elbow connector, for a vertical outlet (to be glued, or push fit).

IMPLEMENTATION

- The installation blue key acts as a protection plug during installation to protect the soil pipe.
- Connection to the soil pipe : by solvent welding or push-fit.
- A waterproofing under screed.must be planned.

MAINTENANCE

Remove and clean the inner trap on a regular basis.

Use a non aggressive cleaner and soft cloth to avoid scratches on the grating.

DIMENSIONS







Head office and factories: 37, rue Pierre et Marie Curie - BP 10966 - 49309 CHOLET cedex - Phone: +33 (0)2 41 63 73 83 SAS (PLC) with a working capital of 7 683 431 E - 060 200 128 RCS Angers